

# MLS 130 LINEAR DISPLACEMENT SENSOR

The MLS130 sealed linear sensor is designed to provide superior performance within a compact, lightweight package in stroke lengths from 25 to 200mm. With a choice of mounting options, including metal rod end bearings, and an optional protective sleeve for extreme environmental conditions, this sensor is ideally suited to motorsport data acquisition applications on suspension and throttle position feedback, where high performance and reliability with competitive pricing and rapid despatch are vital. The sensor is supplied fully sealed to IP66, with an integrally moulded DR25 sheathed multicore cable.

## PERFORMANCE

		25	50	75	100	125	150	175	200
<b>Electrical stroke E</b>	<b>mm</b>	25	50	75	100	125	150	175	200
<b>Resistance ±10%</b>	<b>kΩ</b>	1	2	3	4	5	6	7	8
<b>Independent linearity</b>									
<b>guaranteed</b>	<b>±%</b>	0.25	0.25	0.15	0.15	0.15	0.15	0.15	0.15
<b>typical</b>	<b>±%</b>	0.15	0.15	0.15	0.10	0.10	0.07	0.07	0.07
<b>Power dissipation at 20°C</b>	<b>W</b>	0.5	1.0	1.5	2.0	2.5	3.0	3.5	4.0
<b>Applied voltage maximum</b>	<b>Vdc</b>	22	44	67	74	74	74	74	74
<b>Electrical output</b>		Minimum of 0.5% to 99.5% applied volts							
<b>Resolution</b>		Virtually infinite							
<b>Hysteresis (repeatability)</b>		Less than 0.01mm							
<b>Operational temperature</b>	<b>°C</b>	-30 to +100 (tested to +130 for 12 hours duration)							
<b>Output smoothness</b>		To MIL-R-39023 grade C 0.1%							
<b>Insulation resistance</b>		Greater than 100MΩ at 500Vdc							
<b>Operating mode</b>		Voltage divider only - see Circuit Recommendation below							
<b>Wiper circuit impedance</b>		Minimum of 100 x track resistance or 0.5MΩ (whichever is greater)							
<b>Operating force maximum</b>	<b>gf</b>	500 in horizontal plane							
<b>Sealing</b>		IP66							
<b>Shaft seal life (replaceable)</b>		20 million operations (10 x 10 <sup>6</sup> cycles)							
<b>Sensor track life at 0.25m/s</b>		Greater than 100 million operations (50 x 10 <sup>6</sup> cycles) at 25mm stroke length							
<b>Sensor track dither life</b>		200 million operations (100 x 10 <sup>6</sup> cycles) at ±0.5mm, 60Hz							
<b>Shaft velocity maximum</b>	<b>m/s</b>	10							
<b>Vibration</b>		RTCA 160D 10Hz to 2kHz (random) @ 12.6g (rms) - all axes							
<b>Shock</b>		Less than 0.04% output change @ 2500g - all axes							

## CIRCUIT RECOMMENDATION

Hybrid track potentiometers feature a high wiper contact resistance, therefore operational checks should be carried out only in the voltage divider mode. Hybrid track potentiometers should be used only as voltage dividers, with a minimum wiper circuit impedance of 100 x track resistance or 0.5MΩ (whichever is greater). Operation with wiper circuits of lower impedance will degrade the output smoothness and affect the linearity.

## OPTIONS

<b>Mounting</b>	Metal rod end bearings, quick release balljoints or plain M4 stud
<b>Protective sleeve</b>	Available for all stroke lengths

## ACCESSORIES

For maximum installation flexibility the following parts are available to purchase separately:

Metal rod end (rear)	P202605
Metal rod end (shaft)	P202604
Quick release balljoint assembly	SA200337
Locknut, M4	X63 - 072 - 340
Protective sleeve assembly	SA202984/stroke/C

A suitable stud lock compound should be used to secure the rear rod end or balljoint assembly. Use Loctite™ activator 7471 and Loctite™ 648 on metal rod end. Use Loctite™ 382 on quick release balljoint.

## AVAILABILITY

All configurations can be supplied within five days from the factory.

## ORDERING CODES


MLS130/...../...../.....

Electrical stroke \_\_\_\_\_ Protective sleeve N=None, P=Fitted  
 Mounting \_\_\_\_\_  
 Q=Quick release balljoints, R=Metal rod end bearings, S=M4 studs


## DIMENSIONS AND MOUNTING OPTIONS

Note: drawings not to scale


### QUICK RELEASE BALLJOINTS (Q)

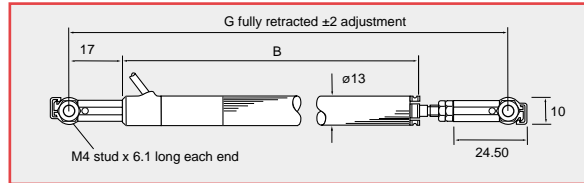


### METAL ROD END BEARINGS (R)

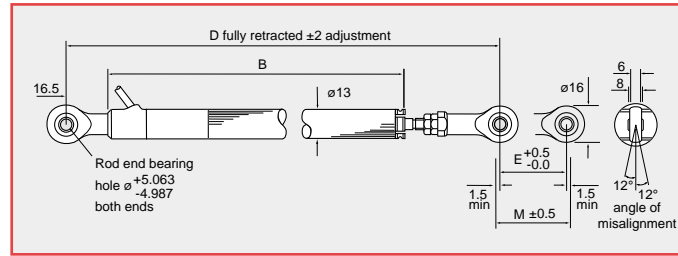

### M4 STUD END (S)

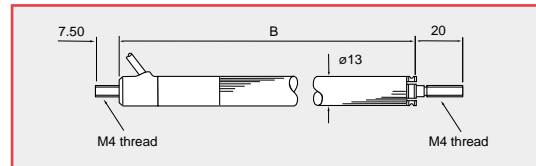


### PROTECTIVE SLEEVE (P)

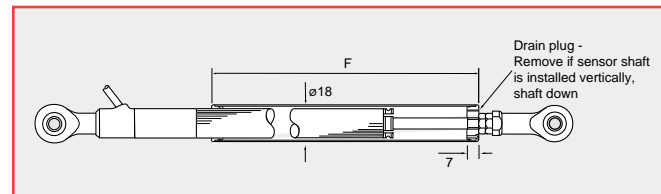

<b>Electrical stroke E</b>	<b>mm</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>175</b>	<b>200</b>
<b>Mechanical stroke M</b>	<b>mm</b>	<b>29</b>	<b>54</b>	<b>79</b>	<b>104</b>	<b>129</b>	<b>154</b>	<b>179</b>	<b>204</b>
<b>Body length B</b>	<b>mm</b>	110.8	135.8	160.8	185.8	210.8	235.8	260.8	285.8
<b>Between centres D</b>	<b>mm</b>	164.5	189.5	214.5	239.5	264.5	289.5	314.5	339.5
<b>Between centres G</b>	<b>mm</b>	153.6	178.6	203.6	228.6	253.6	278.6	303.6	328.6
<b>Sleeve length F</b>	<b>mm</b>	77	102	127	152	177	202	227	252
<b>Weight approximate</b>	<b>g</b>	80	87	94	101	108	115	122	129

## ELECTRICAL CONNECTIONS

3 core cable: DR25 sheathed 1m long with ETFT insulated 19/0.15 cores.

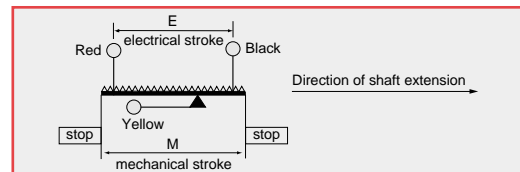



[www.pennyandgiles.com](http://www.pennyandgiles.com)

**Penny & Giles**

Position sensors and joysticks for commercial and industrial applications.

15 Airfield Road  
Christchurch  
Dorset BH23 3TG  
United Kingdom  
+44 (0) 1202 409409  
+44 (0) 1202 409475 Fax  
sales@pennyandgiles.com

36 Nine Mile Point Industrial Estate  
Cwmfelinfach  
Gwent NP11 7HZ  
United Kingdom  
+44 (0) 1495 202000  
+44 (0) 1495 202006 Fax  
sales@pennyandgiles.com

5875 Obispo Avenue  
Long Beach CA 90805  
USA  
+1 562 531 6500  
+1 562 531 4020 Fax  
us.sales@pennyandgiles.com

Straussenlettenstr. 7b  
85053 Ingolstadt,  
Germany  
+49 (0) 841 61000  
+49 (0) 841 61300 Fax  
info@penny-giles.de

The information contained in this brochure on product applications should be used by customers for guidance only. Penny+Giles Controls Ltd makes no warranty or representation in respect of product fitness or suitability for any particular design application, environment, or otherwise, except as may subsequently be agreed in a contract for the sale and purchase of products. Customer's should therefore satisfy themselves of the actual performance requirements and subsequently the products suitability for any particular design application and the environment in which the product is to be used.

Continual research and development may require change to products and specification without prior notification. All trademarks acknowledged.

© Penny+Giles Controls Ltd 2008

Innovation In Motion



[www.cwcontrols.com](http://www.cwcontrols.com)